




Epoxy Wall Coating

FeRFA Type 2 System
DFT = 150 - 300µ

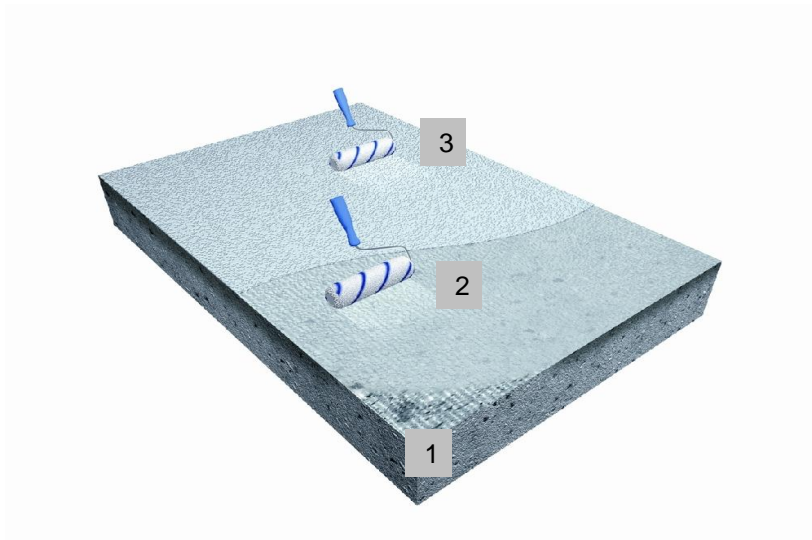

- 1. Surface preparation by suitable mechanical means.
- 2. Application of priming coat of Epoxy BS2000
- 3. Application of 1-2 top coats of Epoxy BS3000 SG/Matt.

System Properties:

- Water based.
- Damp tolerant
- Breathable
- Overcoat most existing paints
- Economic
- Matt or silk gloss
- Tough and colourful.
- VOC free
- Fast drying
- Good opacity
- Smooth surface
- For mineral surfaces

Typical Environment

	Light Loads	✓
	Moderate Loads	✓
	Increased Loads	✗
	Heavy Loads	✗

Suitable for Surfaces

Clean concrete without surface sealer	
Prepared concrete and screeds	
Well adhered existing coating, subject to trial.	
Surfaces prepared by hand grinding	
Suitably prepared walls.	





Epoxy Wall Coating

FeRFA Type 2 System
DFT = 150 - 300µ

Item	Operation	Material / m ²	Price / m ²
1	<p>Surface Preparation The substrate shall be prepared by suitable means to remove all contaminants and weakness to give a clean, sound load-bearing surface. If over coating an existing finish a trial shall be conducted to assess bond.</p>		
2	<p>Priming The prepared surfaces are primed depending on the substrate with Epoxy BS2000.</p>	0.15 kg/m ²	
3	<p>Top Coat The primed surface is coated with Epoxy BS3000 SG/Matt in the desired colour shade. Use at least one top coat, with a second top coat being used for higher film thickness and durability. Where the colour shade of the wall is being changed or very bright or light colours are being used, a second top coat is advised to achieve good opacity.</p>	0.2 kg/m ²	
Total			

Notes: Application rates and coverage are theoretical and do not allow for surface profile variation, wastage or variation in application technique. In the case of high substrate roughness you should allow for additional levelling material to be used.