




Decorative Breathable Coating <0.5mm.

FeRFA Type 2 System
DFT = 150-300µ

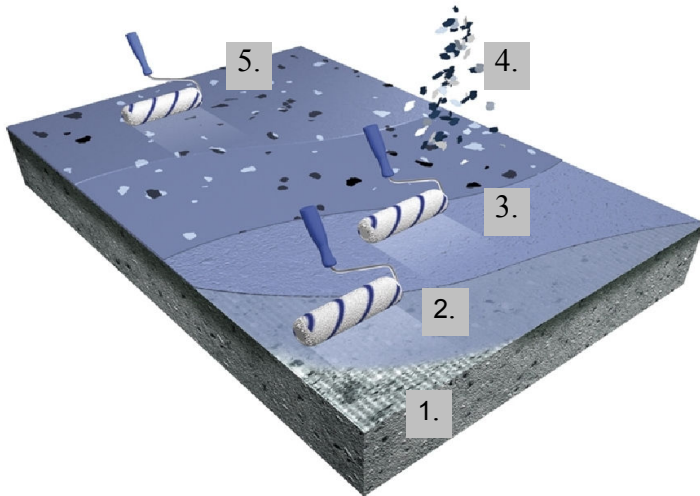

1. Surface preparation by suitable mechanical means.
2. Application of coloured priming coat Epoxy BS2000.
3. Application of coloured Seal coat Epoxy BS3000 SG/Matt.
4. Partially Flake to contrast with Colorid Flake.
5. Seal with chosen sealer e.g. PUR Aqua Top 2KM.

System Properties:

- Decorative multi design
- Improved slip resistance
- Suitable for many substrates
- Economic
- Matt, Silk Gloss and Gloss finishes
- Good opacity
- Alternative to vinyl systems

Typical Environment

	Light Loads	✓
	Moderate Loads	✓
	Increased Loads	✗
	Heavy Loads	✗

Suitable for Surfaces

Clean concrete without surface sealer	
Prepared concrete and screeds	
Well adhered existing coatings subject to trial	
Surfaces prepared by hand grinding	





Decorative Breathable Coating <0.5mm

FeRFA Type 2 System
DFT = 150-300µ

Item	Operation	Material / m ²	Price / m ²
1	Surface Preparation The substrate shall be prepared by suitable means to remove all contaminants and weakness to give a clean, sound load-bearing surface. If over coating an existing finish a trial shall be conducted to assess bond.		
2	Priming The prepared surfaces are primed depending on the substrate with e.g. Epoxy BS2000 in either clear or coloured.	0.1-0.2 kg/m ²	
3	Base Layer The primed surface is coated with Epoxy BS3000 SG/Matt in the desired colour shade.	0.2-0.3 kg/m ²	
4	Flake Broadcast The fresh BS3000 coating is partially flaked to achieve the desired effect in the chosen flake eg Colorid Flake. Once cured sweep loose flakes clear.	0.05 kg/m ²	
5	Seal Coat Seal with PUR Aqua Top 2KM.	0.2 kg/m ²	
Total			

Notes: Application rates and coverage are theoretical and do not allow for surface profile variation, wastage or variation in application technique. In the case of high substrate roughness you should allow for additional levelling material to be used.