




Flexible Renovation Coating

FeRFA Type 2 System
DFT = 150-300µ

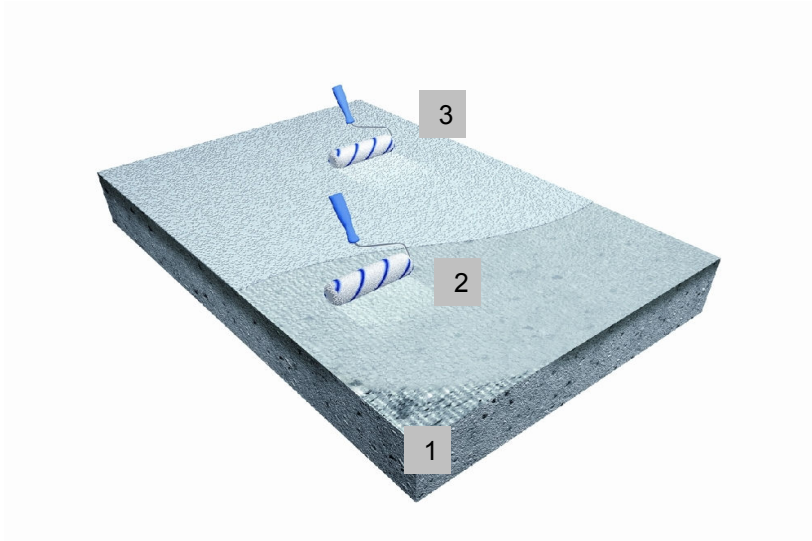

1. Surface preparation by suitable mechanical means.
2. Application of wash primer e.g. PUR Wash Primer.
3. Application of top coat e.g. PUR Top TX blended with Artico Color.

Typical Environment

	Light Loads	✓
	Moderate Loads	✓
	Increased Loads	✓
	Heavy Loads (according to subfloor)	✓


Suitable for Surfaces

Existing, well adhered coatings, subject to trial	
Cleaned and roughened existing coatings subject to trial	

System Properties:

- Tough
- Coloured – wide range
- Easy to apply
- Fast curing
- Matt finish
- Economic
- Light texture
- Very good abrasion resistance
- Solvented
- Excellent quality
- Excellent adhesion to many substrates
- Ideal for dilapidations



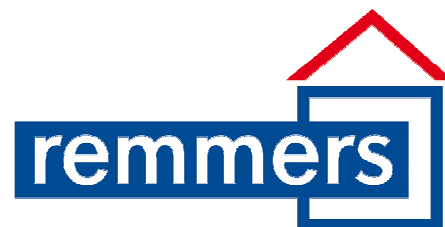

Flexible Renovation Coating

FeRFA Type 2 System
DFT = 150-300 μ

Item	Operation	Material / m ²	Price / m ²
1	Surface Preparation The substrate shall be prepared by suitable means to remove all contaminants and weakness to give a clean, sound load-bearing surface. If over coating an existing finish a trial shall be conducted to assess bond.		
2	Priming The prepared substrate is primed with a suitable primer i.e. PUR Wash Primer by wiping. If indoors – use correct PPE!	0.02-0.05 kg/m ²	
3	Top Coat The cured primer is overcoated with a top coat of PUR Color Top TX blended with Artico Color (10kg:6kg). Apply evenly and back roller with a textured roller to give an even finish.	0.25 kg/m ²	
Total			

Notes: Application rates and coverage are theoretical and do not allow for surface profile variation, wastage or variation in application technique. In the case of high substrate roughness you should allow for additional levelling material to be used.