




# High Build Floor Coating

FeRFA Type 3 System  
DFT = 400 μ

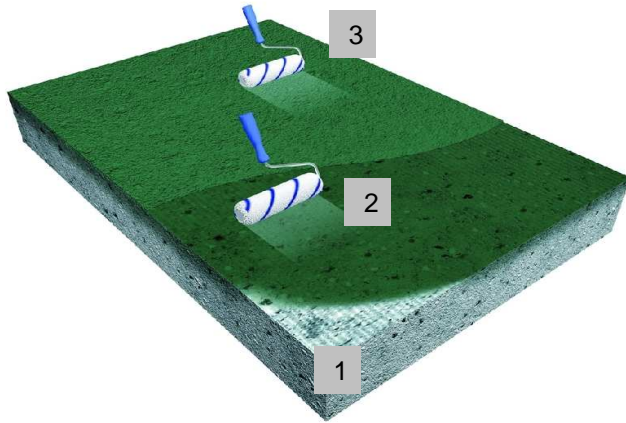

1. Surface preparation by suitable mechanical means.
2. Application by roller of the coloured primer e.g. Epoxy ST100 blended with Artico Color (25kg :1.5kg) by roller.
3. Application by roller of a second coat of e.g. Epoxy ST100 blended with Artico Color (25kg : 1.5kg) by roller.

### Typical Environment

	Light Loads	✓
	Moderate Loads	✓
	Increased Loads	✗
	Heavy Loads	✗

### Suitable for Surfaces

Prepared concrete and screeds	
Existing coated surfaces (subject to trial)	
Surfaces prepared by grinding	

### System Properties:

- Good quality
- Moisture tolerant using Epoxy MT100
- Low viscosity mixing and application
- Economic
- Versatile binder options
- 2 hour cure time using Epoxy Quick 100
- Fast application





## High Build Floor Coating

FeRFA Type 3 System  
DFT = 400 $\mu$

Item	Operation	Material / m <sup>2</sup>	Price / m <sup>2</sup>
1	<b>Surface Preparation</b> The substrate shall be prepared by suitable means to remove all contaminants and weakness to give a clean, sound load-bearing surface. If over coating an existing finish a trial shall be conducted to assess bond.		
2	<b>Priming</b> The substrate is primed using a mix of the appropriate primer e.g. Epoxy ST100 blended with Artico Color at a ratio of 25kg : 1.5kg.	0.2 - 0.25 kg/m <sup>2</sup>	
3	<b>Coating</b> The primed surface is sealed with a second coat of e.g. Epoxy ST100 blended with Artico Color at a ratio of 25kg : 1.5kg.	0.2 – 0.25 kg/m <sup>2</sup>	
<b>Total</b>			

**Notes:** Application rates and coverage are theoretical and do not allow for surface profile variation, wastage or variation in application technique. In the case of high substrate roughness you should allow for additional levelling material to be used.