




High Build Polyurethane Coating

FeRFA Type 3 System
DFT = 500 μ

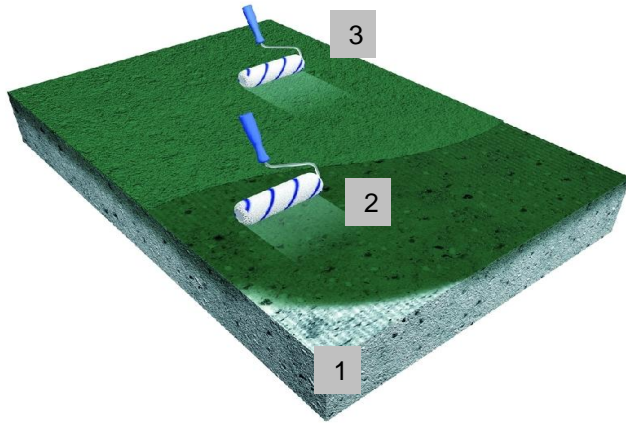

Typical Environment

	Light Loads	✓
	Moderate Loads	✓
	Increased Loads	✗
	Heavy Loads	✗

1. Surface preparation by suitable mechanical means. Primer coat as required according to substrate.

- Concrete - Use eg Epoxy FAS 100
- Asphalt - No primer usually needed, ensure sound condition.
- Existing coating - No primer usually needed, abrade and solvent wipe.

2. Application by roller of PUR Indu Color.

3. Application by roller of a second coat of PUR Indu Color.

Suitable for Surfaces

Prepared concrete and screeds	
Existing coated surfaces (subject to trial)	
Surfaces prepared by grinding	

System Properties:

- High film thickness
- Wide colour range
- Flexible
- Good mechanical resistance
- Can be accelerated
- Good abrasion resistance
- Ideal for asphalt indoors
- Good chemical resistance





High Build Polyurethane Coating

FeRFA Type 3 System
DFT = 500 μ

Item	Operation	Material / m ²	Price / m ²
1	<p>Surface Preparation</p> <p>The substrate shall be prepared by suitable means to remove all contaminants and weakness to give a clean, sound load-bearing surface. If over coating an existing finish a trial shall be conducted to assess bond.</p>		
2	<p>First Coat</p> <p>The prepared substrate is coated with PUR Indu Color, a solvent free coloured polyurethane coating.</p>	0.35 kg/m ²	
3	<p>Top Coat</p> <p>The surface is coated with PUR Indu Color.</p> <p>If an 'easy clean' slip resistant finish is required include 2-5 % by weight of ADD 250 hard polymer beads into the coating. This can be included in both coats for maximum profile should this be desired.</p>	0.35 kg/m ²	
Total			

Notes: Application rates and coverage are theoretical and do not allow for surface profile variation, wastage or variation in application technique. In the case of high substrate roughness you should allow for additional levelling material to be used.