




# High Opacity, High Build Coating

FeRFA Type 3 System  
DFT = 320 μ

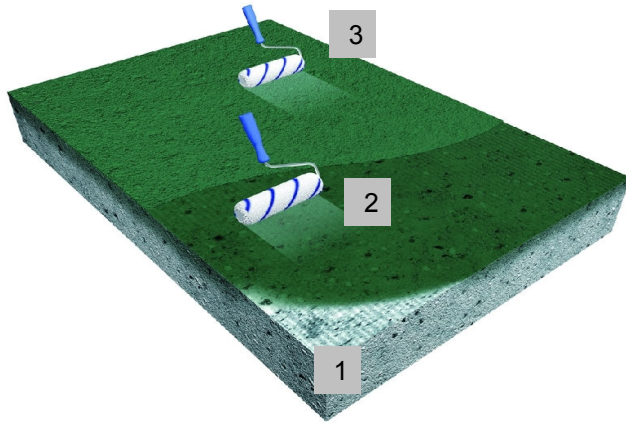

1. Surface preparation by suitable mechanical means.
2. Application by roller of e.g. Epoxyflex Coating PH.
3. Application of the top coat of e.g. PUR Top M/SG/G blended with Artico Color at 2.5kg : 1.5kg by roller.

### System Properties:

- Exceptional opacity
- Excellent scratch resistance
- Full colour range
- Slip resistant grade available using 'Plus' grades
- Extremely tough
- Totally UV stable
- Fast cure possible

### Typical Environment

	Light Loads	✓
	Moderate Loads	✓
	Increased Loads	✗
	Heavy Loads	✗

### Suitable for Surfaces

Blast prepared concrete and screeds	
Ground concrete and screeds	
Existing sound coatings (subject to trial)	
Cementitious substrates	





## High Opacity, High Build Coating

FeRFA Type 3 System  
DFT = 320 $\mu$

Item	Operation	Material / m <sup>2</sup>
1	<p><b>Surface Preparation</b></p> <p>The substrate shall be prepared by suitable means to remove all contaminants and weakness to give a clean, sound load-bearing surface. If over coating an existing finish a trial shall be conducted to assess bond.</p>	
2	<p><b>Priming</b></p> <p>The prepared substrate is primed with Epoxyflex Coating PH, a solvent free coloured epoxy coating with a degree of flexibility.</p>	0.3 kg/m <sup>2</sup>
3	<p><b>Top Coat</b></p> <p>The primed floor is sealed with PUR Top M/SG/G blended with Artico Color Pigment in the selected colour at 2.5kg : 1.5kg mix ratio.</p>	0.12 kg/m <sup>2</sup>

**Notes:** Application rates and coverage are theoretical and do not allow for surface profile variation, wastage or variation in application technique. In the case of high substrate roughness you should allow for additional levelling material to be used.