




Deck Protect ID-Silver

For car park intermediate decks.

FeRFA Type 3 System
DFT = 1mm

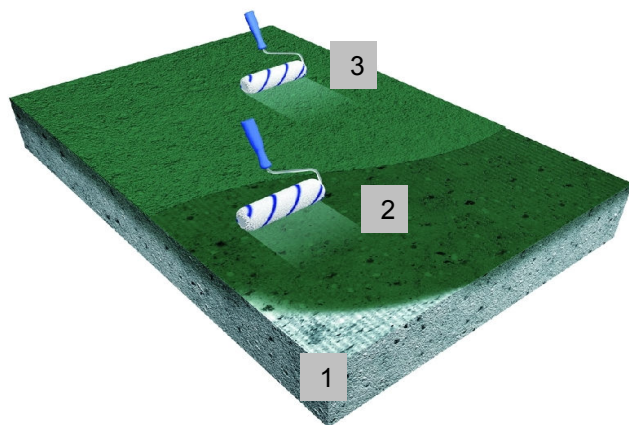

1. Surface preparation by suitable mechanical means.
2. Application of priming coat of e.g. Epoxy BS2000 if required.
3. Application of top coat of Epoxy SiC Color Top.

System Properties:

- Wear resistant
- Static dissipative
- Extremely tough
- Slip resistant
- Economic
- Tough and colourful.
- VOC free
- Quick curing
- Good opacity
- Durable inter-deck system

Typical Environment

	Light Loads	✓
	Moderate Loads	✓
	Increased Loads	✓
	Heavy Loads	✓

Suitable for Surfaces

Clean concrete without surface sealer	
Prepared concrete and screeds	
Well adhered existing coating, subject to trial.	
Surfaces prepared by hand grinding	





Deck Protect ID-Silver

For car park intermediate decks.

FeRFA Type 3 System
DFT = 1mm

Item	Operation	Material / m ²	Price / m ²
1	Surface Preparation The substrate shall be prepared by suitable means to remove all contaminants and weakness to give a clean, sound load-bearing surface. If over coating an existing finish a trial shall be conducted to assess bond.		
2	Priming The prepared surfaces are primed depending on the substrate with e.g. Epoxy BS2000 in either clear or coloured.	0.1-0.2 kg/m ²	
3	Top Coat The primed surface is coated with SiC Color Top in the desired colour shade.	0.7 kg/m ²	
Total			

Notes: Application rates and coverage are theoretical and do not allow for surface profile variation, wastage or variation in application technique. In the case of high substrate roughness you should allow for additional levelling material to be used.