




Deck Protect ID-Gold

For car park intermediate decks.

FeRFA Type 4 System
DFT = 3-4mm

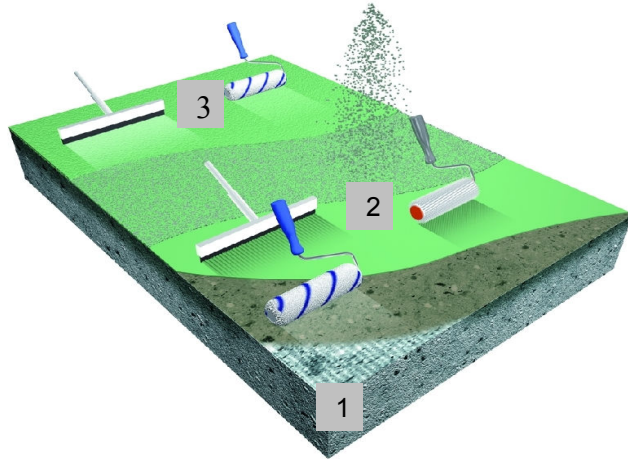

1. Surface preparation by suitable mechanical means.
2. Application by trowel of self-smoothing layer of Epoxy ST100 blended with Quartz 01/03 at 1:1 parts by weight then fully broadcast with Quartz 07/12.
3. Seal coat of Epoxy PH sealer.

System Properties:

- Slightly flexible
- Tough
- Hygienic
- Easy to Clean
- Wide Colour Range
- Tough inter deck system
- High Sheen
- Seamless
- Durable
- Good Chemical Resistance
- Fast Cure is Possible

Typical Environment

	Light Loads	✓
	Moderate Loads	✓
	Increased Loads	✓
	Heavy Loads	✓

Suitable for Surfaces

Rough surfaces	
Steel ball blasted surface	
Ground surfaces	
Concrete slabs	





Deck Protect ID-Gold

For car park intermediate decks.

FeRFA Type 4 System
DFT = 3-4mm

Item	Operation	Material / m ²	Price / m ²
1	Surface Preparation The substrate shall be prepared by suitable means to remove all contaminants and weakness to give a clean, sound load-bearing surface. If over coating an existing finish a trial shall be conducted to assess bond.		
2	Base Layer Apply a layer of Epoxy ST100, blended with Quartz 01/03 (1:1) to surfaces at a typical consumption of 1.8kg/m ² (mixed material) ready to receive a broadcast of Quartz aggregate. Accelerating of cure time is possible with Accelerator PH. Broadcast fully with Quartz 07/12.	Base @ 1.8kg/m ² Quartz @ 4-5kg/m ²	
3	Final Coat Apply a seal coat of Epoxy PH sealer, applied by roller to fully encapsulate the aggregate.	0.7 kg/m ²	
Total			

Notes: Application rates and coverage are theoretical and do not allow for surface profile variation, wastage or variation in application technique. In the case of high substrate roughness you should allow for additional levelling material to be used.