




Hygienic Polyurethane Wall Coating

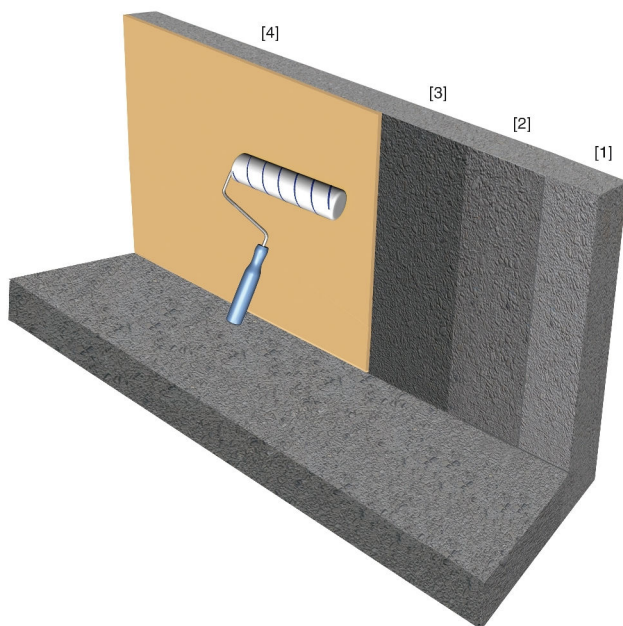

Typical Environment

	Light Loads	✓
	Moderate Loads	✓
	Increased Loads	✓
	Heavy Loads	✗

1. Surface preparation by suitable means.
2. Application of the primer coat e.g. Epoxy BS2000 (white) by roller.
3. Application of intermediate coat of Aidol Compact Varnish PU (with addition of 10% Aqua-480 Hardener), by brush, roller or spray.
4. Application of intermediate coat of Aidol Compact Varnish PU (with addition of 10% Aqua-480 Hardener), by roller or spray.

Suitable for

- Public areas
- Food plants
- Pharmaceutical areas
- Hospitals
- Prisons and cells
- Schools and colleges
- Laboratories

System Properties:

- | | |
|--|--|
| <input type="checkbox"/> Seamless | <input type="checkbox"/> VOC free |
| <input type="checkbox"/> Tough and durable | <input type="checkbox"/> Any colour |
| <input type="checkbox"/> Excellent chemical resistance | <input type="checkbox"/> Economic |
| <input type="checkbox"/> Damp surface tolerant | <input type="checkbox"/> Breathable |
| <input type="checkbox"/> High gloss | <input type="checkbox"/> By brush, roller or spray |
| <input type="checkbox"/> UV Stable | <input type="checkbox"/> Non-yellowing |





Hygienic Polyurethane Wall Coating

Item	Operation	Material / m ²	Price / m ²
1	Surface Preparation The substrate shall be prepared by suitable means to remove all weakness to give a clean, sound load-bearing surface.		
2	Priming The prepared surface is primed with Epoxy BS2000 (white), a water based epoxy primer and coating.	0.1 kg/m ²	
3	Intermediate Coating The primed surface is coated with Aidol Compact Varnish PU (with addition of 10% Aqua-480 Hardener) by roller, brush or spray.	0.12kg/m ²	
4	Top Coating The primed surface is coated with Aidol Compact Varnish PU (with addition of 10% Aqua-480 Hardener) by roller or spray.	0.12kg/m ²	
Total			

Notes: Application rates and coverage are theoretical and do not allow for surface profile variation, wastage or variation in application technique. In the case of high substrate roughness you should allow for additional levelling material to be used.

When overcoating an existing coated surface, a trial is recommended to be undertaken in order to ensure that the existing coating is soundly adhered, compatible and that no adverse reaction occurs when overcoated.

*In order to achieve the highest level of opacity in the final finish, ensure that all coats use a similar or identical colour.